



Adirondack Aire


BY COLD POINT



Series 816 Slant Coil

ClimateMaster 816 Slant Coil

Application Flexible | Fast and Easy Replacement | Damage Protection

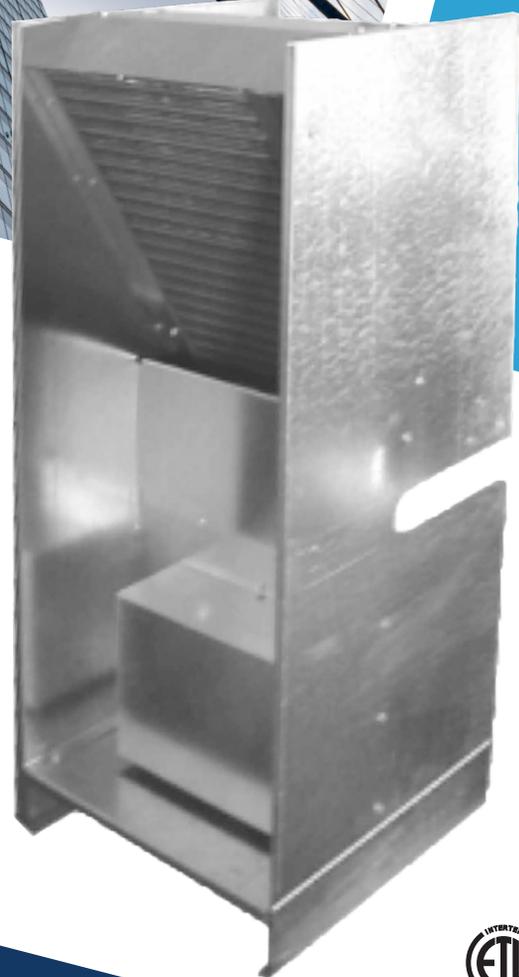

ADIRONDACK-AIRE 816 SLANT COIL CHASSIS SERIES

Replaces ClimateMaster 816 Slant Coil

The Adirondack-Aire 816 Slant Coil Series replacement chassis provides environment friendly, high efficiency cooling and heating where individual, quiet control is a priority. This application-flexible unit is also a direct replacement* for the Climate Master 816 Slant Coil series vertical stacked water source heat pump chassis. The chassis is a part of a complete system, which consists of the chassis, blower section, control box, and furred-in room cabinet with risers. The chassis contains the compressor, air side heat exchanger, water side heat exchanger, and refrigerant circuit control and safety components.

The 816 Slant Coil is dimensionally identical to the original for a fast, easy, and trouble-free installation. Quality components, careful design and testing and the latest in environment friendly technology advances mean long unit life, user satisfaction and lower energy costs. Consider the extensive list of standard features which include: powder painted drain pan, refrigerant circuit access ports, air filter, pull handle, evaporator freeze protection, water coil freeze stat, high-pressure over protection, and lock out circuit. Adirondack-Aire is the replacement solution the competition can't match. Cold Point Corp. backs the 816 with a customer friendly one-year parts and labor warranty and five-year compressor warranty, (see Warranty document for details).

*Various wiring configurations were produced. See specs and price sheet for details.

Standard Features:


- Made in the USA
- Designed for easy installation and compatibility. Dimensionally identical to original ClimateMaster chassis
- ETL Safety labeled
- Quiet, durable, and efficient compressor with built-in pressure and temperature protection
- Heavy gauge G90 galvanized steel construction
- Powder painted drain pan
- High efficiency copper tube-aluminum fin evaporator coil
- High efficiency coaxial condenser coil with low water-side pressure drop
- Lock out circuit with reset at thermostat or circuit breaker
- High pressure switch
- Frost protected cooling
- Water coil freeze protection
- Refrigerant circuit access ports
- Precision selected capillary tube refrigerant control
- Positive shift reversing valve
- Precision charged with zerOzone R-454B A2L refrigerant
- Union water connections
- Chassis pull handle facilitates easy chassis removal and handling
- 1 Inch fiberglass or natural fiber air filter

Electrical Data

Model	Compressor Type	Voltage Volt-Hz-Ph	RLA	LRA	Total Amps	Ckt Amps	Max Fuse	Min Volts
816-10	Rotary	208/230/60/1	3.7	22.0	3.7	5.0	15	197
816-10	Rotary	265/60/1	3.5	22.0	3.5	5.0	15	240
816-12	Rotary	208/230/60/1	4.7	25.0	4.7	6.0	15	197
816-12	Rotary	265/60/1	4.2	22.0	4.2	6.0	15	240
816-15	Rotary	208/230/60/1	5.6	29.0	5.6	7.0	15	197
816-15	Rotary	265/60/1	5.0	28.0	5.0	7.0	15	240



Wiring Configurations



816 SLANT CHASSIS APPLICATION & BENEFITS

Fast and Easy Replacement

The Adirondack-Aire 816 Slant Coil series replacement chassis fits the existing ClimateMaster room cabinets and works with the existing blower section and control box without modification. Because the chassis dimensions and construction details are like the original, replacement work is fast and easy. The chassis installs without the need for water loop shut down or draining. Water, drain and electrical connections line right up to the original installation. The electrical connectors plug directly into the control box connectors. A chassis pull handle is provided to facilitate easy removal and handling. Using Adirondack-Aire replacements eliminate

the need for room renovation, redecorating, and piping changes and is the solution that gets your property back in service quickly and at the lowest total cost.

Damage Protection

The standard high-pressure switch and evaporator coil freeze protection stops unit operation before damage occurs should airflow become reduced or obstructed due to dirty coils, obstructed airflow, or motor failure or lock up. A freestat protects the water coil from freeze damage due to water temperature or flow problems. The water coil is designed for low water-side pressure drop, eliminating potential pump sizing and water flow problems.

Options and Accessories

- Blower sections
- Return air panels
- Wiring configurations
- 115V, 265V/277V (Availability varies by model sizes)
- Control options
- Flow control valve
- Motorized valve

* Various wiring configurations were produced. See specs and price sheet for details.

Performance Ratings


Model	Cool* Btuh	Sens Btuh	EER*	Heat* Btuh	COP	CFM (Design)	GPM	Coil PD	Refrigerant
816-10	9,400	7,400	12.7	11,600	4.20	340	2.5	1.8'	R-454B
816-10	12,200	9,100	12.8	14,000	4.20	420	3.0	2.5'	R-454B
816-12	14,400	10,800	13.0	16,000	4.20	450	3.8	4.6'	R-454B

Continuous engineering improvements may result in performance changes without notice.

* Includes 1250Btu/1000 CFM fan heat and 365w/1000 CFM fan power. Fan power and pumping corrections are not included for rating purposes. 208v data shown. 115v and 265v ratings may vary.

Unit Sizes

Model	A	B	C	D	Chassis Weight (lbs)
	Inches				
816-10	15 5/16	13	15 1/2	40 1/2	80
816-10	15 5/16	13	15 1/2	40 1/2	85
816-12	15 5/16	13	15 1/2	40 1/2	90

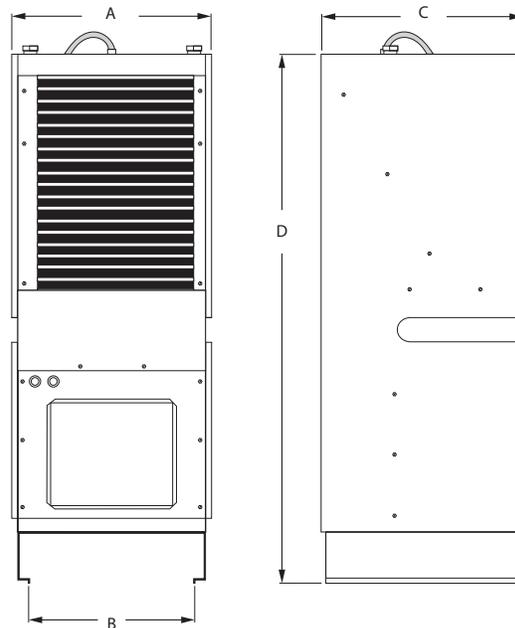

INNOVATIVE HEATING AND COOLING SOLUTIONS

Cold Point equipment has been specified in hundreds of projects in these and other applications:
Direct Replacement | New Construction | Renovation | Commercial & Residential Solutions

Cold Point values reliability as much as you

Your Cold Point sales representative knows their reputation is on the line with every sale. Therefore, they are as personally invested in your comfort as you are, and take great pride in creating your perfect indoor environment.

Rest comfortably, knowing Cold Point stands behind our products

The Cold Point Corporation backs our products with a standard warranty that includes labor for the entire first year of ownership. Registered Limited Warranty terms include: 12 month limited warranty on components, 60 month limited warranty on all unit compressors from the date of original installation OR 15 months limited warranty on components, 63 month limited warranty on all unit compressors from the date of original sale, whichever comes first. For all coverage options and complete coverage terms, check with your local Cold Point representative for full details.

Industry-leading expertise

Cold Point Corporation is the industry-leading supplier of aftermarket comfort solutions for commercial and residential applications. We have over 25 years of experience developing OEM-style replacement products to keep you happy and comfortable. Whether it is a water source heat pump application or an air source PTAC system, Cold Point has the knowledge and products to restore your system to its original operating condition.

Reliable comfort products backed by the industry experts in OEM-style replacement units

To learn more about how the Cold Point Corporation can help you save time and money on your next project, contact your local Cold Point representative. Call **315-339-2331** to speak with one of our specialists, or e-mail your request to info@coldpointcorp.com.

Your Cold Point Representative:



510 Henry Street • Rome, New York 13440
Phone (315) 339-2331 • Fax (315) 339-2358
www.ColdPointCorp.com

©2024 Cold Point Corp. All rights reserved.



rev. 11-24 CPL001