



# Adirondack Aire

BY COLD POINT



## Series CS Slope Top Console Water Source Heat Pump

### Replacement Applications

Application Flexible | Fast and Easy Replacement | Damage Protection  
Field Reversible Cabinet and Chassis for Left and Right Side Water Connections



# ADIRONDACK-AIRE CS SERIES SLOPE TOP CONSOLE

## New Construction and Replacement Applications

The Cold Point CS series slope top console water source heat pump unit provides environment friendly, high efficiency, cooling and heating where individual, quiet control of space is a priority.

The CS series is designed with the growing retrofit market in mind, making it an ideal choice for renovation or new construction projects. The unit cabinet is powder-painted appliance-grade steel and includes an attractive extruded aluminum grille and control door.

The CS series has two chassis sizes, small (models 08, 10 and 12), and large (models 15 and 18). Quality components, careful design and testing, and the latest in environmentally friendly technology advances assure long life, user satisfaction, and lower energy cost.

### Standard Features:

- Made in the USA
- Designed for easy installation and compatibility.
- ETL Safety approved
- Quiet, durable, and efficient compressor with built-in pressure and temperature protection
- Heavy gauge G90 galvanized steel construction
- Stainless steel drain pan
- High efficiency copper tube-aluminum fin evaporator coil
- High efficiency coaxial condenser coil with low water-side pressure drop
- Unit-mounted digital controls
- Electronic control board with anti-short cycle protection and lockout protection
- High pressure switch
- Frost-free cooling
- Water coil freeze protection
- Refrigerant circuit access ports
- Capillary expansion
- Positive shift reversing valve
- Precision charged with R-454B A2L refrigerant
- 1/2 Inch water connections
- Electrostatic washable air filter

### Performance Ratings

Model	Cool Btuh	Sens Btuh	EER	Heat Btuh	COP	CFM Hi/Lo	GPM	Coil PD	Refrig
CS-08	8000	6200	15.5	9000	4.7	300/250	2	10	R-454B
CS-10	10500	7900	14.9	11800	4.6	375/300	2.5	11	R-454B
CS-12	12400	9100	14.8	13500	4.4	400/325	3	12	R-454B
CS-15	15500	11400	15.0	16200	4.5	500/440	3.75	21	R-454B
CS-18	19000	13700	14.8	20700	4.36	600/550	4.25	16	R-454B

Continuous engineering improvements may result in performance changes without notice.

### Replacement Opportunities

JUST SOME OF THE MANUFACTURERS PRODUCTS THAT THE CS SERIES CAN REPLACE	
CLIMATE MASTER CS SERIES	ISLANDAIRE LR SERIES
CLIMATE MASTER TRC SERIES	MCQUAY WMHC SERIES
CLIMATE MASTER CLE SERIES	ICE AIR CHPW SERIES
FLORIDA HEAT PUMP CA SERIES	WATER FURNACE NCC SERIES
FLORIDA HEAT PUMP BC SERIES	BULLDOG SKC SERIES
CARRIER 50 PEC SERIES	TRANE GEC SERIES

### Electrical Data

Model	Compressor Type	Voltage	Fans		Compressor		Total Amps	Ckt Amps	Max Fuse	Min Volts
		Volt-Hz-Ph	Amps	HP	RLA	LRA				
CS-08	Rotary	115/60/1	1.4	1/6	6.1	39.1	8.5	10.0	15	104
CS-08	Rotary	208-230/60/1	0.5	1/6	3.0	15.0	4.5	5.3	15	197
CS-08	Rotary	265/60/1	0.4	1/6	2.7	11.0	4.0	4.7	15	240
CS-10	Rotary	115/60/1	1.4	1/6	8.0	50.0	10.4	12.4	15	104
CS-10	Rotary	208-230/60/1	0.5	1/6	4.4	20.0	5.9	7.0	15	197
CS-10	Rotary	265/60/1	0.4	1/6	3.4	21.0	4.7	5.6	15	240
CS-12	Rotary	115/60/1	1.4	1/6	9.5	50.0	11.9	14.3	20	104
CS-12	Rotary	208-230/60/1	0.5	1/6	4.7	25.0	6.2	7.4	15	197
CS-12	Rotary	265/60/1	0.4	1/6	4.2	22.0	5.5	6.6	15	240
CS-15	Rotary	208-230/60/1	0.5	1/6	5.6	29.0	7.1	8.5	15	197
CS-15	Rotary	265/60/1	0.4	1/6	5.0	28.0	6.3	7.6	15	240
CS-18	Rotary	208-230/60/1	0.5	1/6	7.4	33.0	8.9	10.8	15	197
CS-18	Rotary	265/60/1	0.4	1/6	6.0	28.0	7.3	8.8	15	240

### Electrical Heat Ratings

Heater No.	Volt	Watts	Btuh	HTR Amps	Total HTR Amps	Min Ckt Amps	Max Fuse
1	208	1000	3400	4.8	6.3	7.5	15
	230	2220	4160	5.3	6.8	8.1	15
2	208	2000	6820	9.6	11.1	13.5	20
	230	2000	8350	10.7	12.2	14.9	20
	277	3547	12100	12.8	13.3	16.5	20

### Water Connection Space

Model	48"	52"
CS-08	9.25"	N/A
CS-10	9.25"	N/A
CS-12	9.25"	N/A
CS-15	N/A	7.75"
CS-18	N/A	7.75"

# CS SERIES APPLICATION & BENEFITS

## Damage Protection

The standard high-pressure switch and evaporator coil freeze protection, in conjunction with the electronic control board, stops unit operation before damage occurs, should airflow become reduced or obstructed due to dirty filters, or motor failure. A freestat protects the water coil from freeze damage due to low water temperature or flow problems. The water coil is designed for low water-side pressure drop, eliminating potential pump sizing and water flow problems. High efficiency compressors provide demonstrated reliability and low sound levels and reduce energy costs.

## Fast and Easy Replacement

Because the CS dimensions and construction details were established with retrofit projects in mind, replacement work is fast and easy. With the compact footprint and a cabinet height short enough to fit under window sills, the need for expensive room renovation, redecorating, or piping & wiring changes is eliminated. The CS Series is the solution that gets your property back in service quickly and at the lowest total cost.

## Field Reversible Cabinet and Chassis

The CS console system will allow you to field reverse the chassis and cabinet to

accommodate your facilities water supply configuration. One system for both left and right hand water supply.

## Options and Accessories

- Flow control valve
- Electric or hydronic heat
- Control options
- Valves and unions
- Line cords
- Boilerless
- Low temp option
- Hose kits
- Customer-specified custom features

## Dimensional Data


### Cabinet Dimensions

Model	A	B	C	D	E	F
	Inches					
CS-08	48	6 3/8	1/2	10 3/4	25 1/2	4 1/2
CS-10	48	6 3/8	1/2	10 3/4	25 1/2	4 1/2
CS-12	48	6 3/8	1/2	10 3/4	25 1/2	4 1/2
CS-15	52	9 1/4	1/2	12 1/2	25 1/2	5 1/2
CS-18	52	9 1/4	1/2	12 1/2	25 1/2	5 1/2

### Optional Cabinet Lengths (A)


44 9/16" • 54 9/16"

Custom cabinet lengths available  
consult factory

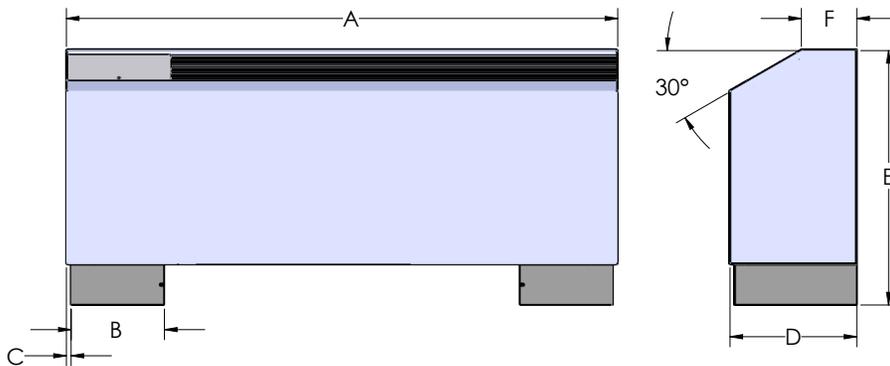

### Chassis Dimensions

Model	G	H	I	J	K	L	M	N	O	P	Q	W
	Inches											
CS-08	1 5/8	25 1/4	4 1/8	15 1/8	7/8	37 3/4	N/A	N/A	10 1/4	4 1/4	12 1/2	1/2
CS-10	1 5/8	25 1/4	4 1/8	15 1/8	7/8	37 3/4	N/A	N/A	10 1/4	4 1/4	12 1/2	1/2
CS-12	1 5/8	25 1/4	4 1/8	12 1/2	7/8	37 3/4	N/A	N/A	10 1/4	4 1/4	12 1/2	1/2
CS-15	1 3/4	25 1/2	4 1/4	13 3/8	7/8	42 3/4	3 1/4	2 7/8	12 1/4	5 1/4	11 7/8	1/2
CS-18	1 3/4	25 1/2	4 1/4	13 3/8	7/8	42 3/4	3 1/4	2 7/8	12 1/4	5 1/4	11 7/8	5/8

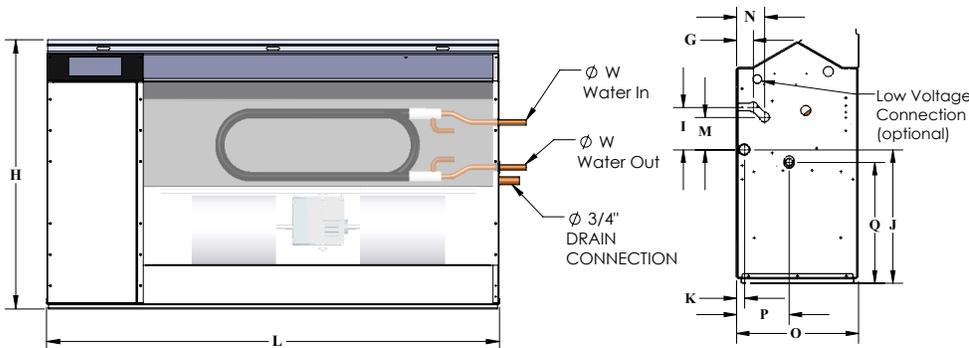

## Optional Hot Water Performance Data

Size	EWT (°F)	Delta T (°F)	Total Capacity	GPM	Pressure Drop (Ft)
08	180	10	9.6	2.0	0.5
		12	9.2	1.6	0.3
		14	8.9	1.3	0.2
		16	8.6	1.1	0.2
10	180	10	12.9	2.6	1.0
		12	12.6	2.2	0.7
		14	12.2	1.8	0.5
		16	11.8	1.5	0.4
12	180	10	13.0	2.7	1.0
		12	12.7	2.1	0.7
		14	12.3	1.5	0.5
		16	11.9	1.5	0.4
15	180	10	16.2	3.3	1.7
		12	15.8	2.7	1.2
		14	15.5	2.3	0.9
		16	15.0	1.9	0.6
18	180	10	17.5	3.6	2.0
		12	17.0	2.9	1.3
		14	16.6	2.5	1.0
		16	16.2	2.1	0.7

Size	EWT (°F)	Delta T (°F)	Total Capacity	GPM	Pressure Drop (Ft)
08	140	10	5.2	1.0	0.2
		12	4.9	0.8	0.1
		14	4.7	0.7	0.1
		16	4.5	0.6	0.1
10	140	10	7.3	1.5	0.4
		12	7.0	1.2	0.3
		14	6.6	1.0	0.2
		16	6.2	0.8	0.1
12	140	10	7.4	1.5	0.4
		12	7.0	1.2	0.3
		14	6.7	1.0	0.2
		16	6.3	0.8	0.1
15	140	10	9.4	1.9	0.7
		12	8.9	1.5	0.4
		14	8.6	1.3	0.3
		16	8.0	1.0	0.2
18	140	10	10.1	2.1	0.8
		12	9.6	1.6	0.5
		14	9.1	1.3	0.3
		16	8.7	1.1	0.3

# INNOVATIVE HEATING AND COOLING SOLUTIONS

Cold Point equipment has been specified in hundreds of projects in these and other applications:  
Direct Replacement | New Construction | Renovation | Commercial & Residential Solutions

## Cold Point values reliability as much as you

Your Cold Point sales representative knows their reputation is on the line with every sale. Therefore, they are as personally invested in your comfort as you are, and take great pride in creating your perfect indoor environment.

## Rest comfortably, knowing Cold Point stands behind our products

The Cold Point Corporation backs our products with a standard warranty that includes labor for the entire first year of ownership. Registered Limited Warranty terms include: 12 month limited warranty on components, 60 month limited warranty on all unit compressors from the date of original installation OR 15 months limited warranty on components, 63 month limited warranty on all unit compressors from the date of original sale, whichever comes first. For all coverage options and complete coverage terms, check with your local Cold Point representative for full details.

## Industry-leading expertise

Cold Point Corporation is the industry-leading supplier of aftermarket comfort solutions for commercial and residential applications. We have over 25 years of experience developing OEM-style replacement products to keep you happy and comfortable. Whether it is a water source heat pump application or an air source PTAC system, Cold Point has the knowledge and products to restore your system to its original operating condition.

## Reliable comfort products backed by the industry experts in OEM-style replacement units

To learn more about how the Cold Point Corporation can help you save time and money on your next project, contact your local Cold Point representative. Call **315-339-2331** to speak with one of our specialists, or e-mail your request to [info@coldpointcorp.com](mailto:info@coldpointcorp.com).

Your Cold Point Representative:



510 Henry Street • Rome, New York 13440  
Phone (315) 339-2331 • Fax (315) 339-2358  
[www.ColdPointCorp.com](http://www.ColdPointCorp.com)

©2024 Cold Point Corp. All rights reserved.



rev. 11-24 CPL001